

Niuminco Group Limited

MARCH 2021 QUARTERLY ACTIVITIES REPORT

Niuminco Group Limited's objective is to establish a substantial resource base in Papua New Guinea and Australia whilst developing its Edie Creek Mine into a successful and profitable mining operation.



HIGHLIGHTS

- Production of 915.3g (29.4 ounces) gold and 979.0 g (31.5 ounces) silver for sales of A\$63,745 (PGK177,071).
- 53.0 wet tonnes of vein material processed at an average recovered gold grade of 17.3 g/t.
- Edie Creek Mining Lease ML 511 renewal application prepared (lodged electronically subsequent to quarter-end).

EDIE CREEK MINE

Vale Eric Namaliu

It is with deep sadness we report the passing of our greatly respected and much-admired Edie Creek Registered Mine Manager, Mr. Eric Namaliu on 21 April 2021in Lae, Papua New Guinea.

The Board of Directors and all members of the Niuminco team extend our deepest sympathy and condolences to Eric's wife, children and their broader family.

Eric, who was Niuminco's Mine Manager from 2012 to 2016 and again from mid-2019 to the present, will be sadly missed by all the Niuminco team, his many colleagues in the mining industry and his many friends in the wider community.

Rest in peace Eric.

Mining and Production

During the March Quarter the Company continued its focus on small-scale development/mining of potentially high-grade veins at the Alpha East, Alpha West (Edie lode), Mounts and Surmans/Midas vein areas.

Limited mining and processing resulted in 53 tonnes of wet material being processed at an average recovered gold grade of 17.3 g/t, producing 915.3 grams (29.4 ounces) of gold and 979.0 grams (31.5 ounces) of silver.

This resulted in sales of \$63,745 (PGK177,071) during the guarter.

Edie Creek Exploration

Drill-plan preparation work continued for the Enterprise diatreme and the Karuka-Enterprise vein systems/stock-work areas.

This drilling program, with a 12-month budget of \$100,000 - \$150,000, aims to achieve two objectives:

- 1. It will form part of the mine grade control program and assist in prioritising the mining of higher-grade vein material as feed for the processing circuit; and,
- 2. It will assist in advancing a JORC 2012 resource delineation program.

Mining Lease Renewal Application

Subsequent to the quarter-end, on 27 April 2021, the Company's PNG subsidiaries lodged a renewal application for the Edie Creek Mining Lease ML511 and paid the next year's rental fee on the lease to 17 May 2022. The current 10-year lease expires on 21 October 2021.

MAY RIVER EXPLORATION

During the Quarter further preparation work was undertaken on EL 2527at May River.

The scheduled Warden's Hearing at Hotmin village on 1 March 2021 was postponed due to the mourning period following the death of founding PNG Prime Minister Sir Michael Somare and rescheduled to 30 March 2021. Due to the COVID situation this Hearing was again postponed and has now been rescheduled for 8 June 2021, subject to any further COVID-19 travel restrictions and/or safety directions.

Whilst plans to dispatch a helicopter-lifted field work team for the Hearing were again put on hold as a result of the postponement, a two-man team was sent overland and by river to the tenement 10 days prior to the planned hearing. They carried out site preparation works and an awareness campaign with local villagers, who are supportive of, and looking forward to, the Company advancing the exploration program.

This tenement holds the highly prospective Iku Hill anomalies and base camp area at Hotmin.

CHILLAGOE MINING LEASES 20513, 20515 and 20516

During the March Quarter Mr. Nethery continued further field and data assessment of the Sonya Hills leases. Traversing, remote sensing and GSQ airborne geophysical data has confirmed that Sonya Hills has the same geological and surface geochemical parameters as Harpers, immediately to the north (Figure 1), and to the other substantial gold bearing systems in the district, Red Dome and Mungana:

- It has the same N-trend as Harpers but is displaced 700m to the west by a NW-trending dextral (i.e. right-handed) fault inferred from the geophysics,
- The Chillagoe Formation limy sequence has strong gold-copper bearing skarn development extending for about 1500m x 200m,
- Major igneous plutons locally impinge on both the western and eastern sides and are the Ruddygore Granodiorite and Almaden Granodiorite, which at 300 million years (Ma) are inferred to post-date the gold mineralisation,
- Smaller igneous bodies, some of which were previously mapped by both company and government geologists as related to the above, are actually leucocratic (i.e. lacking mafic minerals), unlike the granodiorites, and comprise microgranite, porphyry, pegmatite and aplite, which are inferred as being about 320Ma, hence the gold-fertile suite in the district.
- The leucocratic bodies have miarolitic cavities, meaning the magma was originally very fluid charged, and similar to those at the unusual Timbarra gold deposit in northern NSW.
- A late phase of very amorphous quartz flooding and brecciation is analogous to the epithermal mud-pool sinters at Harpers, Red Dome and Mungana.

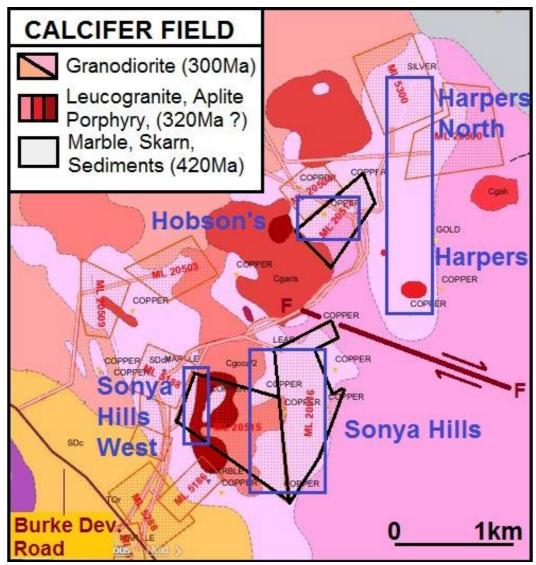


Figure 1: AFM MLs 20513, 20515 & 20516 (black outline), Target areas approximate Boundaries (blue outline), Dextral fault (dark brown), most other MLs are for marble, 1km from Burke Development Road 10km from Chillagoe

CORPORATE

On 19 January 2021 the Company sent a letter and provided further information to ASX in response to outstanding and remaining matters raised in ASX's further query letter in respect of the Company's on-going suspension and potential delisting.

On 19 February 2021 the ASX responded, advising that there were still four unresolved/unsatisfied items outstanding, and that the Company would be delisted on 26 February 2021 as a result of it being suspended for a continuous 2-year period.

On the same date, 19 February 2021, the Company advised ASX and the market that it was moving its primary listing to PNGX Markets Limited (Papua New Guinea Securities Exchange) where the Company has been listed since 2013.

The Company is currently finalising a change of share registrars which it expects to conclude in the coming weeks. The Company is hopeful of finalising this and other matters to allow the reinstatement of trading in the Company's shares in the near future.



Authorised for release by Tracey Lake, Managing Director on behalf of the Board of Niuminco Group Limited. 30 April 2021

The information in this report that relates to exploration/mining and production results is based on Information reviewed by John Nethery (BSc Dip Ed.) who is a Fellow of the Australasian Institute of Mining and Metallurgy (Chartered Professional) and a Fellow of the Australian Institute of Geoscientists. Mr Nethery is an employee of Nedex Pty Ltd which is a shareholder in the Company and is a Director of the Company, and has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Nethery consents to the inclusion in the report of the matters based on this information in the form and context in which it appears.

Niuminco confirms that it is not aware of any new information or data that materially affects the information included in all PNGX/ASX announcements referenced in this release, and that all material assumptions and technical parameters underpinning the estimates in these announcements continue to apply and have not materially changed.

SCHEDULE OF TENEMENTS

Permit Type	Permit Number	Location	Held Via	Beneficial %	Agreement Type
PAPUA NEW GI	JINEA ASSETS				
Exploration Licence	EL 2527 - expired April 2020	May River	Niuminco (ND) Limited	100	
Exploration Licence	EL 2527 Renewal lodged	May River	Niuminco (ND) Limited	100	
Mining lease	ML 511	Edie Creek	Niuminco Edie Creek Limited Niuminco EC Ltd	83 17	
Mining lease	ML 380	Edie Creek	Niuminco Edie Creek Limited Niuminco EC	83 17	
AUSTRALIAN AS	SSETS (Acquir	ed in the Sept	tember Quarter)		
Mining lease – transfer pending	ML 20513	Chillagoe	Niuminco Group Ltd	90	
Mining lease – transfer pending	ML 20515	Chillagoe	Niuminco Group Ltd	90	
Mining lease – transfer pending	ML 20516	Chillagoe	Niuminco Group Ltd	90	

JORC Code, 2012 Edition – Table 1 report to accompany the March 2021 Quarterly Activities Report on exploration/mining and production results.

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	 Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	 This is reporting a mining exercise. Only qualitative sampling by panning of small amounts of mined vein material and low grade/waste material adjoining the vein was done to establish the presence of free gold before mining, separation of waste and transporting of both vein material and/or waste to the production plant for separate processing. The vein was exposed by removing overburden and adjoining waste material with the use of an excavator and/or a bulldozer. The vein material was predominantly mined by hand or occasionally by using the small, 6-tonne excavator, loaded into tubs, or the bucket of the loader, then transported to the gold room for processing through the barrels or the bedan bowl. The low grade/ waste material adjoining the vein was stockpiled, panned and if showing some visible gold, trucked to the ROM pad for loading into the ball mill feed hopper, and processing through the ball mill.
Drilling techniques	 Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	No drilling was done.

Criteria	JORC Code explanation	Commentary
Drill sample recovery	 Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	No core sample recovery, as no drilling was done.
Logging	 Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	 No core samples logged, as no drilling was done. The weight of material processed through each of the ball mill and the barrels (or rod mills) is calculated by recording the number of hopper loads processed through the ball mill and the number of barrels processed each day.
Sub- sampling techniques and sample preparation	 If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all subsampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size 	 No drill core, as no drilling was done. The vein material and low grade/waste material were separated during the mining operation as described above and delivered separately to the gold room/processing plant. The vein material was taken to the gold room for processing through the barrels, where the quantity and weight of material processed and wet amalgam produced is recorded after each barrel or bowl is processed, then tallied on a daily basis The low grade/waste material was delivered to the ball mill ROM pad, loaded into the feed hopper and then processed through the ball mill and Inline Spinner concentrators before then being amalgamated in the bedan bowl. The quantity and weight of material processed and wet amalgam produced from the ball mill is recorded daily, along with the number of hours that the mill ran. The recording of each barrel or bowl processed, the daily ball mill volumes and weight and wet amalgam produced is supervised, overseen and checked by the Company's Metallurgist and Processing Manager and/or the Assistant Processing Manager and/or the Mine Manager.
Quality of assay data and	 The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF 	 Gold and silver are recovered using mercury amalgamation. Mercury is added directly into to the barrels (small rod mills) with the vein material and water. The vein material is then milled/processed for 1 to 2 hours, washed out of the barrels by hosing and then the residual amalgamated material has the mercury squeezed out of it. The wet amalgam is then weighed and stored in a safe before being retorted. The retorted material/dore is weighed, stored and then delivered to the Company's gold buyer

Criteria	JORC Code explanation	Commentary
laboratory tests	 instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	 The quantity of mercury used in each barrel is also recorded. The material that has been washed from the barrels is captured/stored in a concrete drain and sump and then reprocessed through using the same processing operation. This is known as 'regrinding" and the wet amalgam produced is again recorded, weighed and stored, before retorting and delivery. Concentrate from the ball mill and spinners is placed in the bedan bowl, mercury and water are added and after grinding the residual amalgamated material treated the same way as the barrel material
Verification of sampling and assaying	 The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	 The wet amalgam produced is recorded separately for each barrel processed and reprocessed (reground), and for each bedan bowl of ball mill concentrate or other vein material processed, and these are tallied and recorded on a daily basis. The total amount of wet and retorted amalgam is then recorded when a delivery and sale is to be made and the gold buyer smelts the retorted dore, and reports the quantity of gold and silver produced form that delivery batch This data is from the buyer's laboratory which can be audited if required
Location of data points	 Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	Mine extraction site is recorded by DGPS
Data spacing and distribution	 Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	 As these are mining production results,, the distribution of, and area from which the vein material is recovered is not accurately recorded, but as the material and amalgam produced is recorded from separate batches, and on individual days, grade variations can be calculated , but are reported as an "average" over certain periods.
Orientation of data in relation to geological structure	 Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	These are the results of on-going mining operations, no drilling programs are currently underway in this area.

Criteria	JORC Code explanation	Commentary
Sample security	The measures taken to ensure sample security.	 Chain of custody is managed by Niuminco. Material is supervised from mining through production to sale of production.
Audits or reviews	 The results of any audits or reviews of sampling techniques and data. 	No audits or reviews have been carried out at this stage, but are always available to be undertaken.

Section 2 Reporting of Exploration/Mining Production Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	 Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	 The results reported relate to mining carried out within Mining Lease Number 462. This is one of the contiguous Mining Leases held by Niuminco collectively known as the Edie Creek Leases. They are ML, 144, 380, 384 - 392, 402 - 410, 444 - 446 & 462. The Leases are issued under the Authority of the PNG Mining Act (1992). Niuminco holds an 100% interest in the ML's. A royalty on production of Kina10/oz up to 20,000oz and Kina5/oz is payable to Barrick in ML 144.(2.5 Kina are approximately equal to 1\$Aus). The tenements are in good standing and no known impediments exist.

Criteria	JORC Code explanation	Commentary
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties. Deposit type, geological setting and style of	 Gold lodes were originally discovered in the area by individual prospectors in the mid 1920's. Mining has been conducted at Edie lode for almost 90 years and approximately 75,000 oz has been produced. Renison Goldfields Consolidated drilled 2 diamond holes in 1988 and conducted surface geochemical sampling. The sampling protocols employed are similar to those currently used by Niuminco, are of standard industry practice employing geochemical analysis of sawn half core, and are deemed appropriate for epithermal gold mineralisation. ANALABS laboratories were used for Au analyses. Method GG334; 30g sample, aqua regia digest, carbon rod. Niuminco are unable to verify the integrity of the sampling and assay protocols of a 12 hole program carried out by Edie Creek Mining in JV with Wayburn Resources in 1997. Until the results can be verified, the results will be deemed as a geochemical indicator guide to mineralisation. Sampling of core from the Niuminco 2010-2011 drill program followed identical sampling protocols as those currently used. Samples were dispatched to ALS Townsville for analysis. Assay method for Au assays was screen fire assay on all of the oversize fraction and two samples each of 30g of the undersize fraction. Other elements by ICP. Mincor carried out drilling, geochemistry and geophysics on the ML's during a JV with Niuminco from 2011 - 2013. The drilling and geochemical program followed identical sampling protocols to those of Niuminco in its 2010-2011 and current campaign. Intertek Lae completed the analytical work. Mineralisation at Edie Creek is classified as low sulphidation epithermal gold-silver-quartz-
, 	mineralisation.	carbonate mineralisation in an island arc setting.
Drill hole Information	 A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all 	No drilling was done

Criteria	JORC Code explanation	Commentary
Data aggregation methods	 drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	 No reporting of metal equivalents is used. The gold and silver figures recorded are the actual gold and silver produced and sold on any given day and are provided by the Company's gold buyer following their smelting and assaying of the delivered dore. The average grade of the gold reported for, or over, a certain period/number of days is calculated by dividing the quantity of gold produced and sold for that period by the respective weights of the vein material and waste material processed in that same period. The proportional split between the gold produced from the vein material and the low grade/waste material is calculated by using the same direct proportion of wet amalgam produced from each material over that period.
Relationship between mineralisation widths and intercept lengths	 These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	The geometry of the mineralized material is incompletely known and determination of that is partly the reason for the shallow mining extraction.

Criteria	JORC Code explanation	Commentary
Diagrams	 Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	Refer to previous reports. This update does not require sections.
Balanced reporting	 Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	 Broad surface geochemical exploration results are reported as being anomalous or not. Subdivision into specific class intervals will be tabled. Reporting of continuous significant surface assays, and assays to 50m below the surface, use no Au cut-off. No top cut has been applied.
Other substantive exploration data	 Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	•
Further work	 The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large- scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	 Niuminco will carry out a scout drilling program over known veins, and gold anomalous rock/channel chip samples within the Edie Creek leases that are determined by excavation to be of adequate size and grade to warrant such a program.